

JinkoSolar Energizes Nigerian Mini Grid with 2.03MWh Innovative C&I Energy Storage Solution

Jinkosolar today announced it has delivered its 2.03MWh C&I energy storage system (JKS196-675K-150H) to A4&T Power Solutions for a mini grid project under the REA Performance-based grant program under the REA in the south west region of Nigeria. These ESSs can provide robustness to the micro grid installation by improving resiliency of the electrical supply and creating an ROI for the stakeholders.

Jinkosolar's C&I ESS, a fully integrated, pre-configured battery storage solution uses best-in-class (LFP) battery chemistry to deliver 135 kWh of battery capacity. It includes inverter(s), battery cabinet, battery modules, BMS, local controller, cooling system, fire suppression system, all contained in outdoor rated enclosures. This turnkey solution reduces on-site installation time and can be easily scaled up.

The integrated multi-level Battery Management System (BMS) continuously monitors performance, to allow for system optimization and balancing. Air cooling (base option) or advanced liquid cooling (premium option) helps extend the lifespan of the batteries and ensures optimum performance even in the toughest of climates.

It has a slick compact design with the flexibility to fit into indoor as well as outdoor spaces, thanks to the outdoor-rated enclosure. With IEC62619, UL9540A, CE, UN 38.3 certifications, and built-in fire suppression, this ESS offers safe operation and peace of mind.

In addition to standalone operation in off-grid mode for power backup, Jinkosolar's C&I ESS provides peak shaving for demand charge management, load shifting for time-of-use savings.

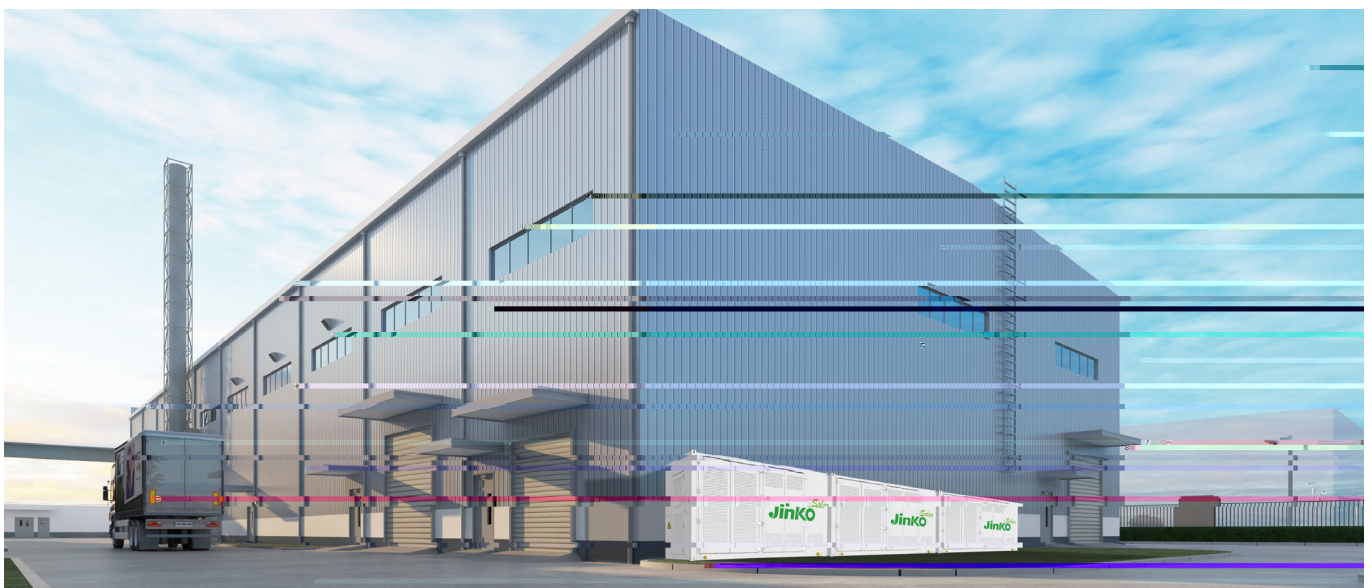


Figure 1: Project Photos


JKS196~675K-150H



Key Features

- Highly integrated system with various working modes
-
-
-

System Topology

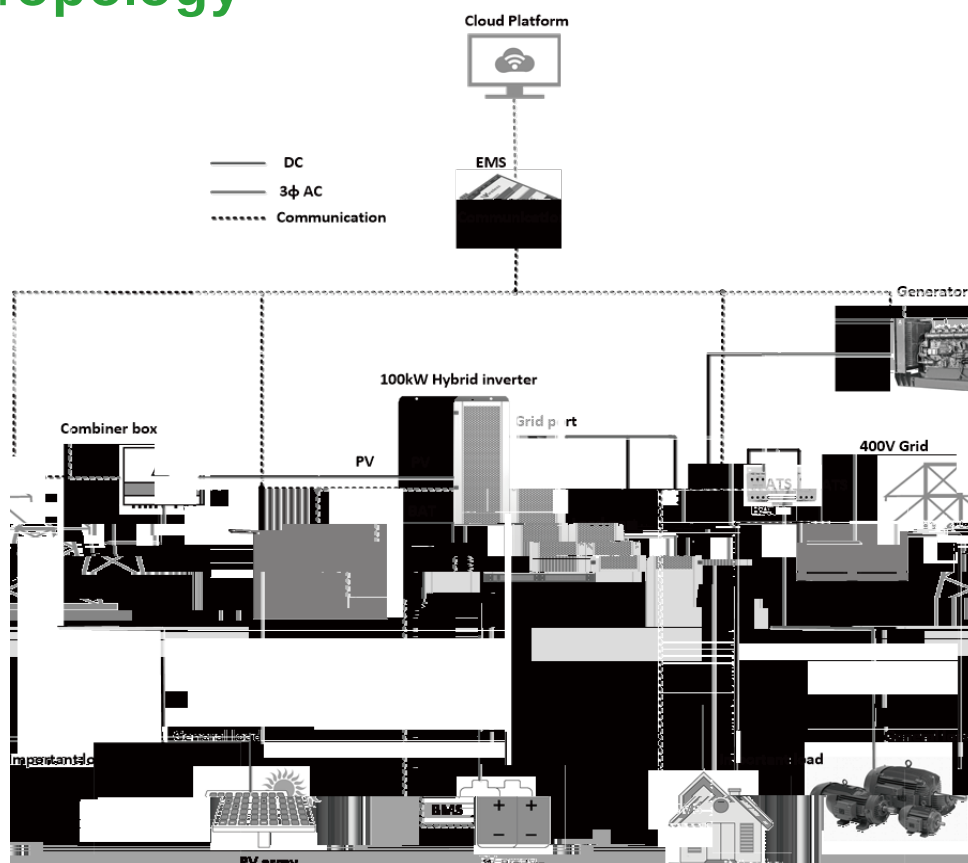

SYSTEM TECHNICAL SPECIFICATIONS

DC Data		JKS196K-150H	JKS405K-150H	JKS675K-150H
Battery Chemistry		Lithium Iron Phosphate (LFP)		
Cycle Life	5,000 Cycles 1C@25℃ 90%DOD	5,000 Cycles 0.5C@25℃ 90%DOD		
Nominal Voltage		3.2V/96Ah		
Battery Configuration	2P8S	3P11S	5P11S	
DC Energy Capacity	196kWh	405kWh	675kWh	
Max. Discharge Current	512V	704V		
Temperature Range	448V~576V	616V~792V		
Battery Communication Interface		RS485, Ethernet		
Battery Communication Protocol		Modbus RTU, Modbus TCP		
Max. System Voltage		1000V		
Max. Power / Max. Current		120/240kW		
Max. Charge Voltage		250-850V		
Max. Charge Current @100% SOC		450-850V		
AC Data				
Max. AC Power		150kW		
Rated AC Power		165kW		
Max. System Voltage		400V		
AC Input Current		216A		
THD		≤3%		
Power Factor		1 (leading) ~1 (lagging)		
Max. Frequency (Hz)		50/60Hz		
AC Configuration		3W+N+PE		
Max. Power		150kW		
Max. Response Time		≤20ms		
General Data				
Dimensions (W*D*H)		2,991*2,438*2,591mm		6,058*2,438*2,591mm
Weight		<6T	<10T	<15T
Protection Rating		IP54		
Operating Temperature Range		-20~40℃		
Max. Humidity		0~95% (non-condensing)		
Max. Altitude		3,000m		
Cooling System		HVAC		
Communication Interface		RS485, Ethernet, GPRS		
Certifications		UL9540A, IEC62619, CE, UN38.3		

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.