



Case Study

Jinko ESS 微电网交流耦合系统解决方案

0,3KU-2,6KU f

Ge_ l k s

o

/754

¶

Mjsqces l M`_q_ lhm /755

DCQR?A 0.02 5 ¶

3. #

@mj_ Rg l s`s

33.

¶ Umjc Qmwg l i_

//iT

0,3KUn


/,0KUn

0,3KU

NAQ 2,6KU f

@CQQ

)

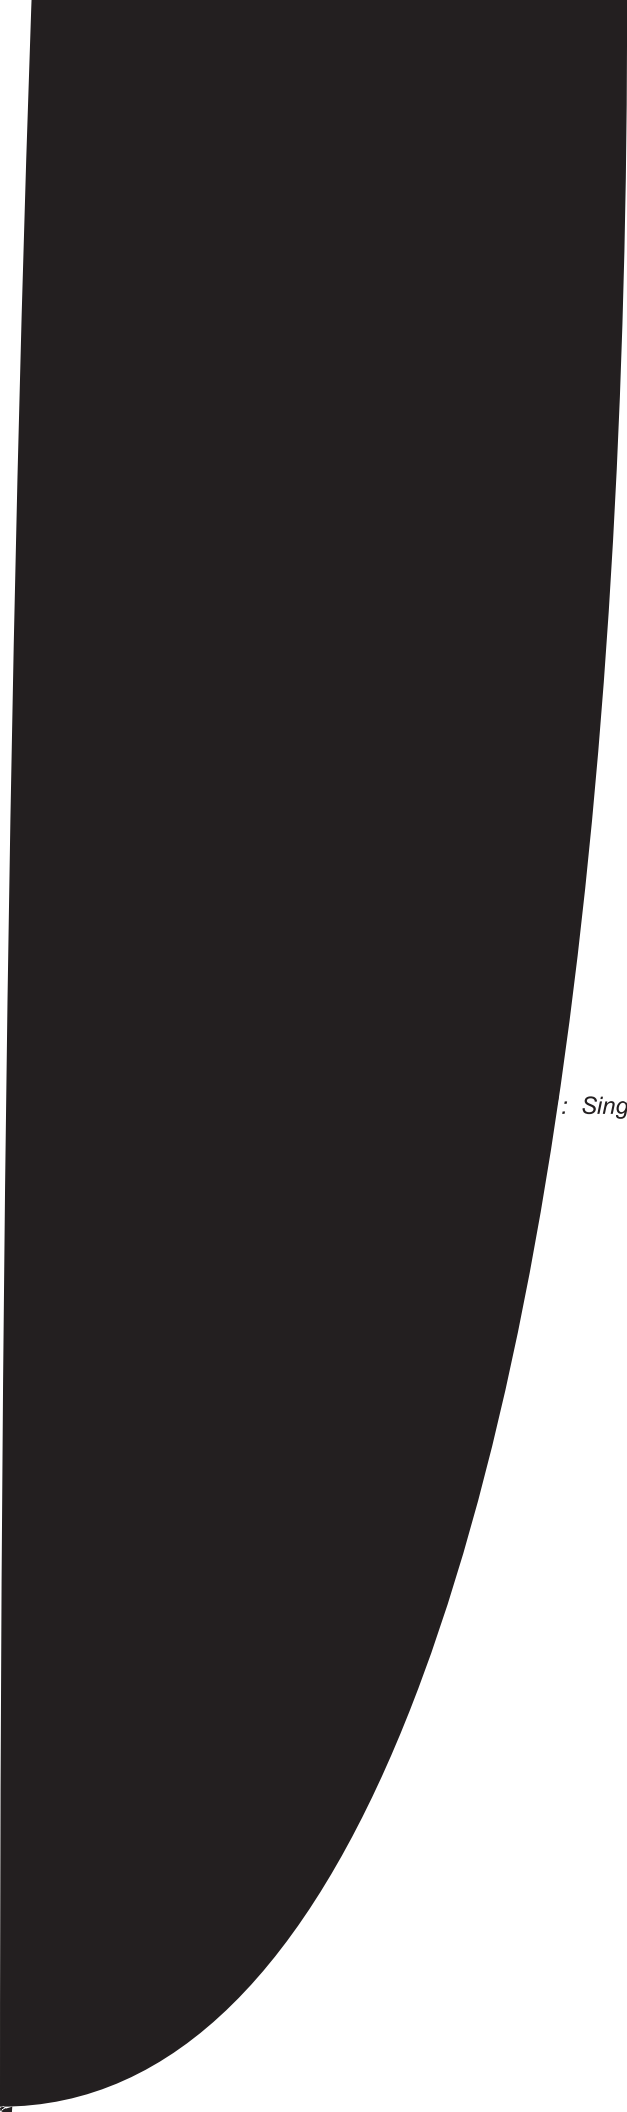

: *Single Lin*

Figure 2: Power Comparison Graph

